




# LAMELLA

## Installation guide for connection box

Step 1:

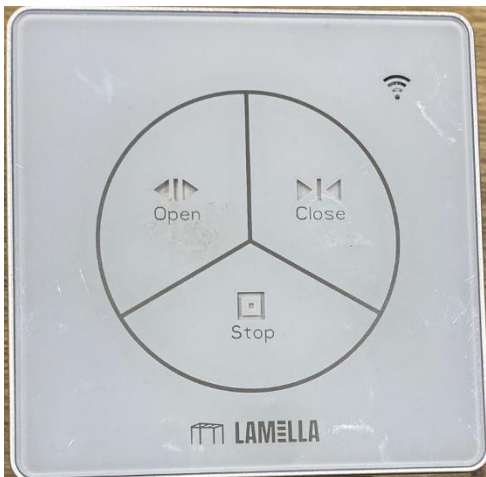

Take the white box shown in the photo on the left. It can be identified by its 3 options: 'open', 'close', and 'stop'.

Step 2:

The boxes should be installed as shown in the photo on the right

The **left side** is for the power supply.

- Brown (L Phase)
- Yellow/green ( $\equiv$  Earth)
- Blue (N neutral)

**Please note, this must always be a grounded 220V cable.**

On **the right side** of the connection box, you will see the motor cable:

- Connect blue to + (as indicated in the image on the right)
- Connect brown to - (as indicated in the image on the right)




**Attention:** Ensure that you always mount the cables **through the gland and tighten it well**. Failure to do so may result in leakage.

---

Step 3:

Now that you have correctly mounted the box, place the box into the holder provided. The left photo shows the empty holder, and the right photo shows the holder with the box inserted. If done correctly, the box should fit in with little effort.



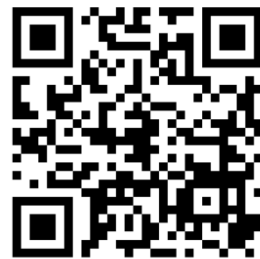

Step 4:

**-Remote control motors (This step can only be done once the power is connected!)**


**Scan the QR code at the top right of the page for a video instruction.**

The white remote control belongs to the motors.

1. To install, press the button with the minus (–) on the remote control and the 'stop' button on the white box at the same time.



2. Keep the buttons pressed until a blue light starts flashing on the white box.

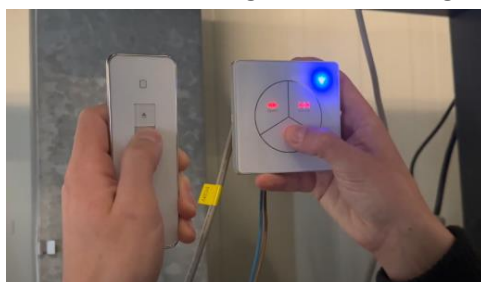

3. Continue to hold the stop button on the box while pressing the up arrow button on the remote control.



4. The remote control is now installed!

**The connection box is now correctly mounted!**